



## POWER AND VERSATILITY MADE FOR TRAILBLAZERS.

The Fecon 155VST Mulching Tractor is ideal for all forestry mulching applications. From large scale right of way maintenance to vegetation management and lot clearing jobs, the 155VST's 150 HP class power and versatility allow any job to be completed with confidence and ease.

# 155VST

## MULCHING TRACTOR

### NOTES:

---



---



---



---



---

### DIMENSIONS

SPECS	STANDARD	METRIC
OVERALL HEIGHT	103" (8' 7")	2,620 mm
OVERALL WIDTH	72.5" (6' 1/2")	1,840 mm
OVERALL WIDTH WITH BULLHOG	87" (7' 3")	2,210 mm
OVERALL LENGTH	169" (14' 1")	4,290 mm
OVERALL LENGTH WITH BULLHOG	214" (17' 10")	5,440 mm
WEIGHT	17,250 lbs	7,825 kg
WEIGHT WITH BULLHOG	20,900lbs	9,480 kg
GROUND PRESSURE WITH BULLHOG	4.8 psi (SAE J1309)	.33 kg/cm <sup>2</sup>
TRAVEL SPEED	4 mph	6.5 km/h
CAB CERTIFICATIONS	ROPS (ISO 8082), FOPS (ISO 8083) and OPS (ISO 8084)	

### PERFORMANCE

SPECS	STANDARD	METRIC
MULCHER CIRCUIT	60 gpm @ 5,000psi	227 Lpm @ 345 Bar
AUXILIARY CIRCUIT	26 gpm @ 3,000 psi	98 Lpm @ 207 Bar
HYDRAULIC TANK CAPACITY	55 gallons	208 Liters

### ATTACHMENTS

SPECS	
AVAILABLE ATTACHMENTS	BH85SD-2 Bull Hog®, BK7620 Bull Hog® BLACKHAWK
MOUNTING STYLE	Pin-On
LIFT STYLE	Loader Arms

MAX REACH WITH BULLHOG	137" (11'5") to Bottom of Rotor	3,480 mm
MAX BELOW GRADE WITH BULLHOG	32"	813 mm

### ENGINE

SPECS	STANDARD	METRIC
MAKE	Cummins F3.8	
DISPLACEMENT	3.8L	
CYLINDERS	4	
AFTER TREATMENT	Tier 4 Final, Stage V	
MAX HORSEPOWER	155HP	116 kW
MAX TORQUE	457 ft*lb @ 1500 rpm	620 Nm @ 1500 rpm
FUEL TANK CAPACITY	45 gallons	170 Liters
DEF TANK CAPACITY	5 gallons	19 Liters
ELECTRICAL SYSTEM	12V	
BATTERY	Dual 12V	
SLOPE RATING	40° in all directions	

### UNDERCARRIAGE

SPECS	STANDARD	METRIC
CLASS	D3	
MANUFACTURER	ITR	
TRACK WIDTH	20"	508 mm
STANDARD GROUSER	Single	
ROLLER WHEELS	2 top / 7 bottom	
GROUND CLEARANCE	21"	533 mm

• Certain guarding and features may have been removed for illustrative purposes.  
 • ALWAYS RUN WITH PROPER GUARDING IN PLACE.  
 • Weights may vary based on options.  
 • Specifications subject to change without notice.

• Photographs may have been altered for marketing purposes.  
 • SAFETY IS THE RESPONSIBILITY OF THE OPERATOR.  
 • Always ensure your carrier's safety features, including ROPS & FOPs, meet your job safety requirements.  
 • Pictures may contain optional accessories.

**FECON**<sup>®</sup>  
 FECON.COM | 800-528-3113

155BRY\_112022v1




**155VST**  
MULCHING TRACTOR

**FECON**

# 155VST



## IMPROVED DURABILITY & SERVICEABILITY

- ✓ Large engine bay doors provide easy access to the entire engine compartment
- ✓ Hydraulic pumps located at the rear of the machine for easy access
- ✓ All filters and service points can be reached from the ground, making servicing the 155VST simple and easy to do in the field

CUMMINS 3.8L TIER 4 FINAL, STAGE V ENGINE



20" STEEL TRACK MACHINE

## 155VST LOADER ARMS

- ✓ The 155VST is the only dedicated machine in the class with loader arms
- ✓ Increased productivity from the increased lift and range of motion
- ✓ Range of motion gives operator more finite control over the mulching head, leading to increase in productivity


BH85SD BULLHOG MULCHING ATTACHMENTS AVAILABLE




## 155VST UNDERCARRIAGE

- ✓ The D3 undercarriage in the 155VST is designed for the toughest mulching applications, resulting in longer track life and less downtime
- ✓ Ground clearance on the 155VST is 21"

### COMPATIBLE MULCHING ATTACHMENTS

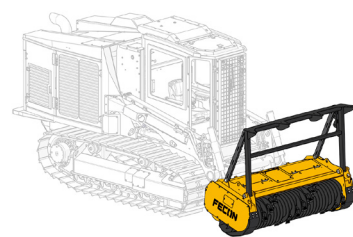

Bull Hog® BH085SD Mulching Head (included)



Bull Hog® BLACKHAWK BK7620 Mulching Head

## FECON POWER MANAGEMENT®

- ✓ Constant monitoring of the hydraulic circuits allows for engine horsepower to be routed to where it is needed most
- ✓ The system allows for the 155VST to mulch uphill while maintaining control over both the loader arms and track system

# YOUR SUCCESS MATTERS.

Whether you are buying, renting, or servicing your mulching equipment, FECON has solutions that focus on your success. Operator driven design with a global network that is woven into every product.



LEARN MORE >

